


Item #: W48FPCR Assembly Instructions

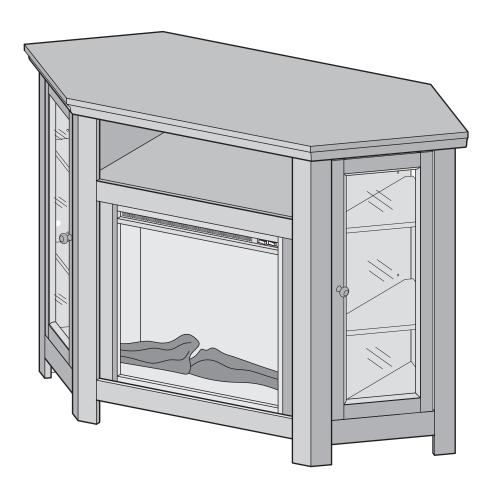


To request missing, lost or broken parts, or for any other customer service issues, please visit our website at **www.walkeredison.com** or call us at 877-207-5906.

Revised 07/2016

General Assembly Guidelines

- I. Ensure that all parts and hardware are available before beginning assembly.
- II. Follow each step carefully to ensure the proper assembly of this product.
- III. Two people are recommended for ease in the assembly of this product.
- IV. The three main types of hardware used to assemble this product are : wood dowels , screws and bolts.
- V. The provided glue is to secure wood dowels in place. When first inserting dowels, locate the appropriate hole for the dowel, place a small amount of glue in the hole and insert the dowel. Wipe away excess glue immediately.




In future assembly steps when dowels are necessary to attach assembly parts together , place a small amount of glue on the end of the dowel before attaching parts together . Wipe away excess glue immediately.




VI. A Phillips head screwdriver is required for the assembly of this product.



VII. Power tools should not be used to assemble this product.



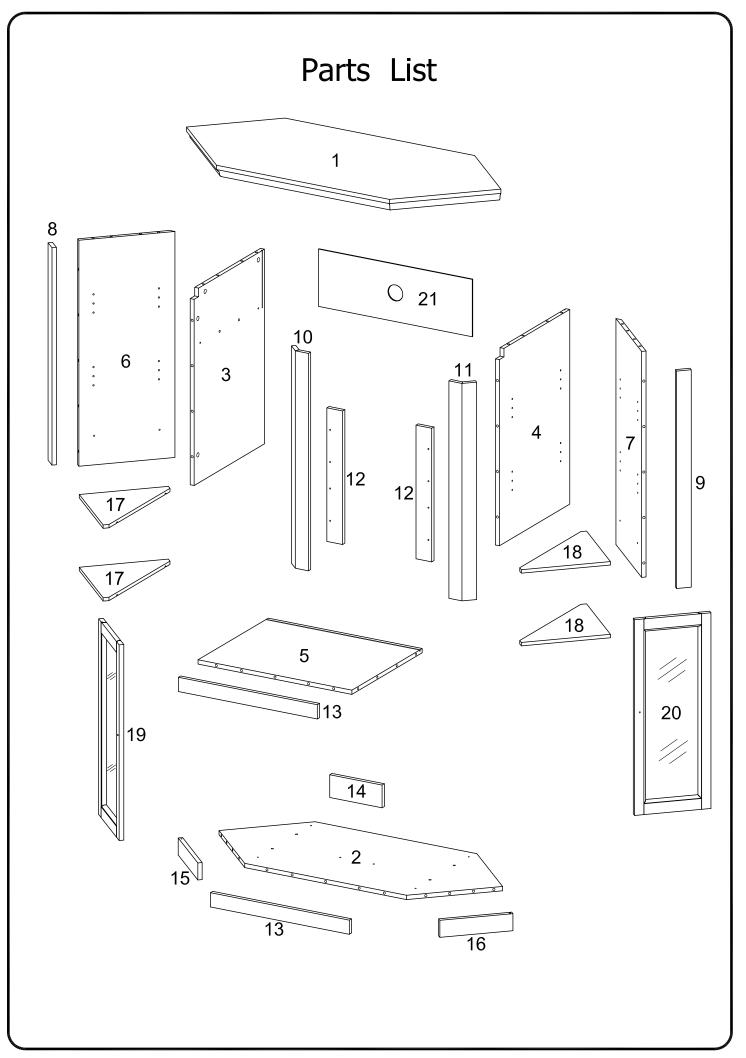


| Ha | rdv | vare | ist |
|------|-----|-------|-------|
| ı ıu | ıωv | vui C | J |

| Α | | Ø8x30mm | Wooden dowel | 34 | pcs | |
|---|-------------------------------|--|-------------------------------|----|-----|--|
| В | | Ø8x20mm | Wooden dowel | 4 | pcs | |
| С | | Ø8x30mm | Cam bolt | 36 | pcs | |
| D | | Ø15x12mm | Cam lock | 28 | pcs | |
| Е | | Ø15x9mm | Cam lock | 8 | pcs | |
| F | | | Door stopper | 2 | pcs | |
| G | < | Ø3x15mm | Screw | 4 | pcs | |
| Н | <i>ammmmm</i> | Ø6x50mm | Screw | 8 | pcs | |
| J | √ 111111111 √ } | Ø3x12mm | Screw | 10 | pcs | |
| K | | Ø25x17mm | Handle | 2 | pcs | |
| L | (3) | Ø4x19mm | Screw | 2 | pcs | |
| M | | 30x20mm | Metal piece | 2 | pcs | |
| N | | 40x15.5x15mm | Door Hinge | 2 | pcs | |
| Р | | 40x15.5x15mm | Door Hinge | 2 | pcs | |
| Q | 8 | Ø9.5x12mm | Plastic pivot | 4 | pcs | |
| R | | Ø5x17mm | Shelf support pin | 16 | pcs | |
| S | Amm (3) | Ø4x25mm | Screw | 4 | pcs | |
| Т | | | Plastic wedges | 4 | pcs | |
| U | | Ø3x17mm | Screw | 4 | pcs | |
| V | | Ø3x12mm | Screw | 6 | pcs | |
| W | | Ø4mm | Wrench | 1 | рс | |
| Χ | | | Glue tube | 2 | pcs | |
| Υ | | Ø30mm | Sticker | 40 | pcs | |
| Z | | | Fireplace Insert (F18V66L) | 1 | рс | |
| | | Philips head screwdriver required for assembly | | | | |


Philips head screwdriver required for assembly (not included)

The hardware quantities listed above are required for proper assembly.

Some extra hardware may also have been included.

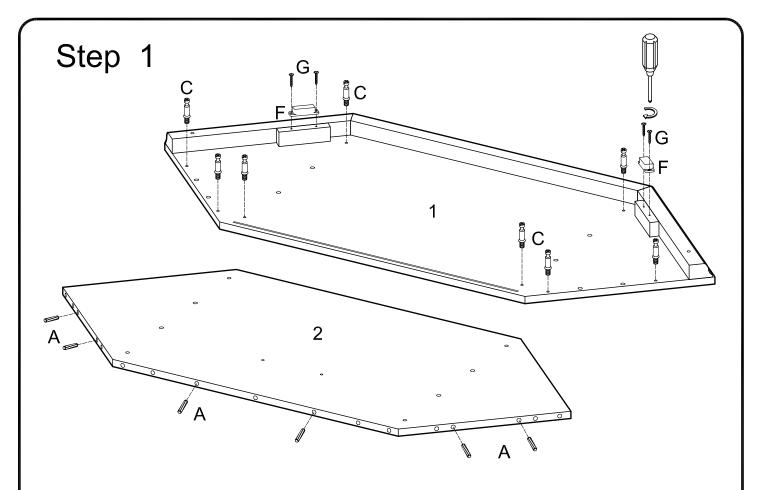


Insert the cam bolts (C) and door stopper (F) into the top panel (1) by using screws (G). Insert the wooden dowel (A) to the bottom panel (2).

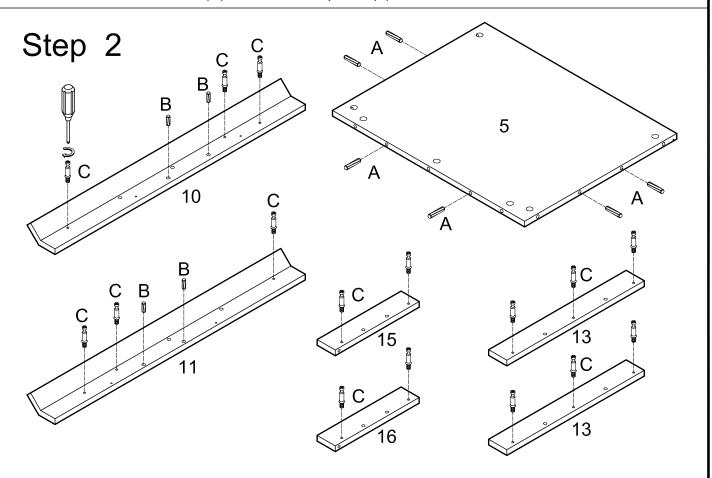


Insert the cam bolts (C) to the front panel (10,11,13,15,16). Insert the wooden dowel (B) to the front panel (10)(11) and wooden dowel (A) to middle panel (5).




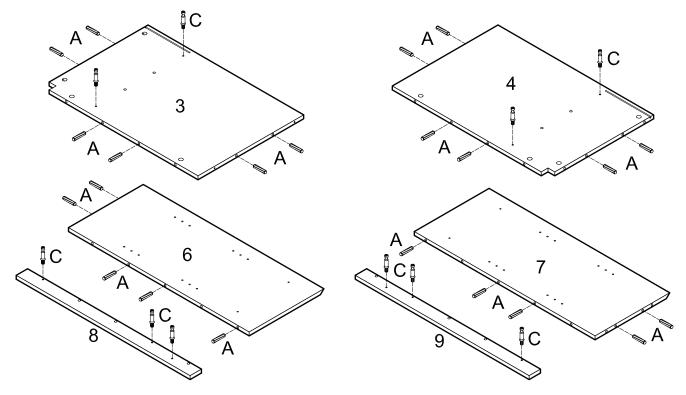

Insert the wooden dowel (A) into the side panel (3,4,6,7). Insert the cam bolts (C) into the side panel (3,4,6,7) and front panel (8)(9).

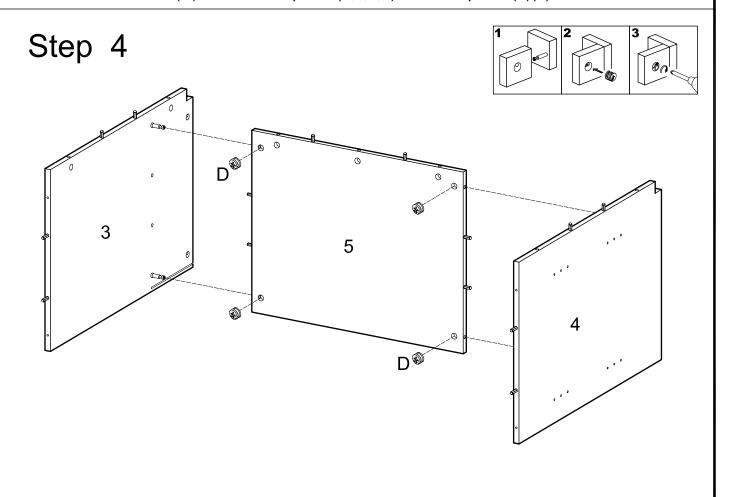


Attach the side panel (3)(4) to the bottom panel (5) and secure it with the cam locks (D).

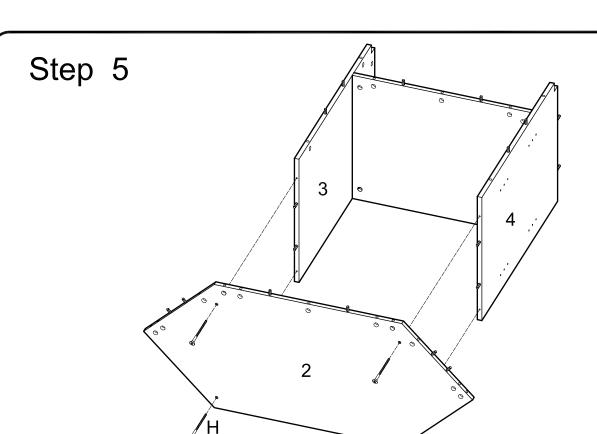


Attach the bottom panel (2) to the side panel (3)(4) and secure it with screw (H) and wrench (W).


W

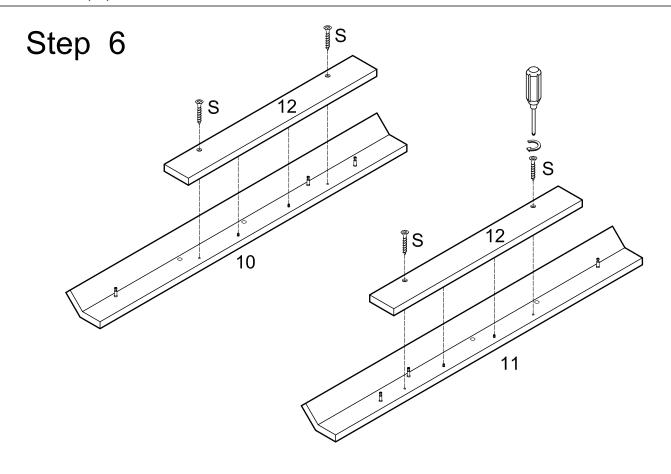


Attach the support slats (12) to the front panel (10)(11) and secure it by using screw (S).

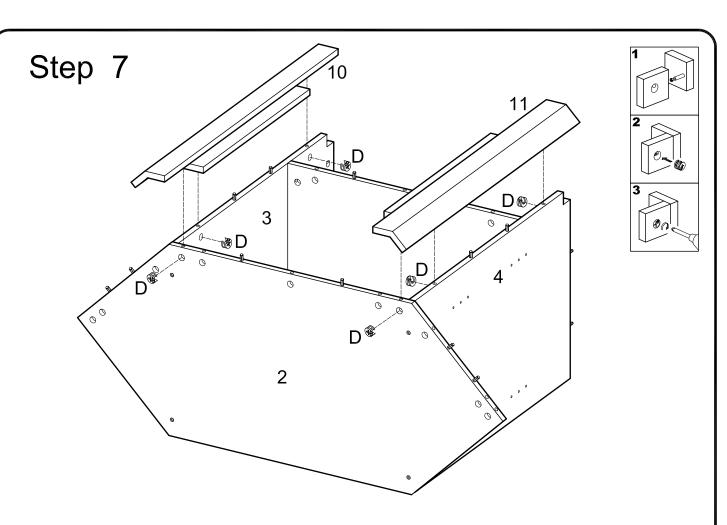


Attach the front panel (10)(11) to the side panel (3)(4) and secure it by using cam locks (D).

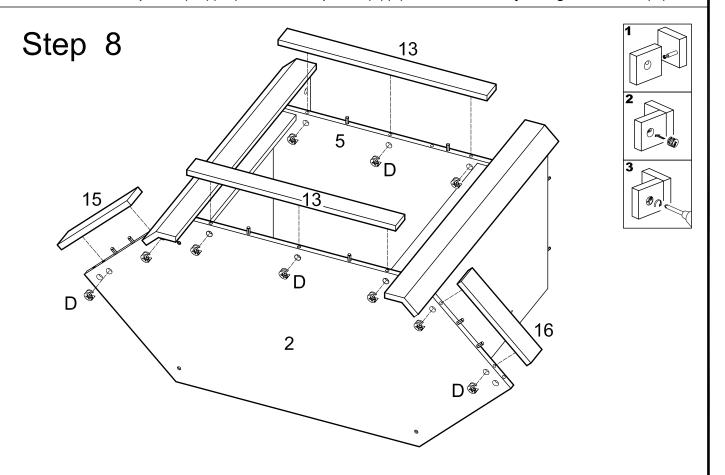


Attach the front panel (13)(15)(16) to the bottom panel (2) and middle panel (5) by using cam locks (D).

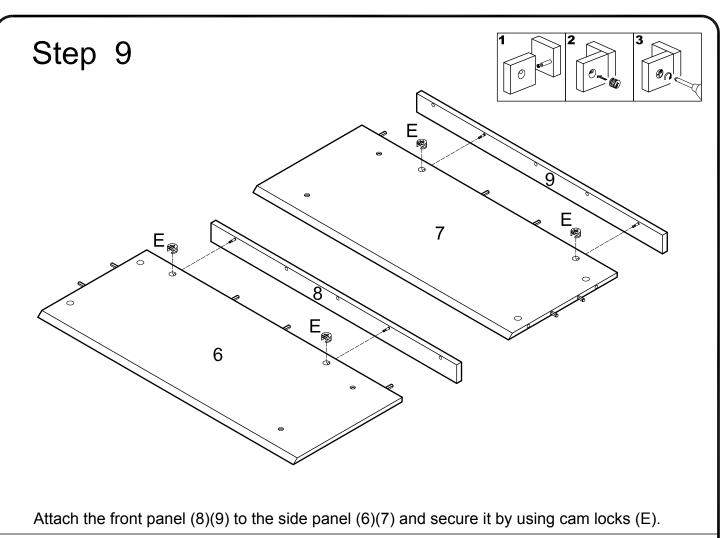

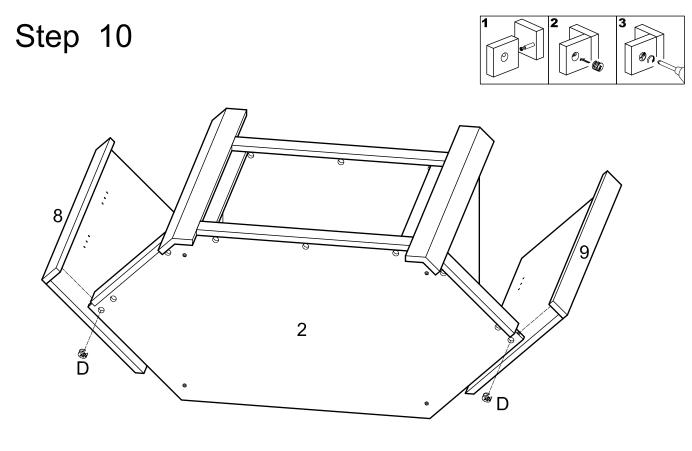



Attach the side panel (8)(9) to the bottom panel (2) and secure it by using cam locks (D).

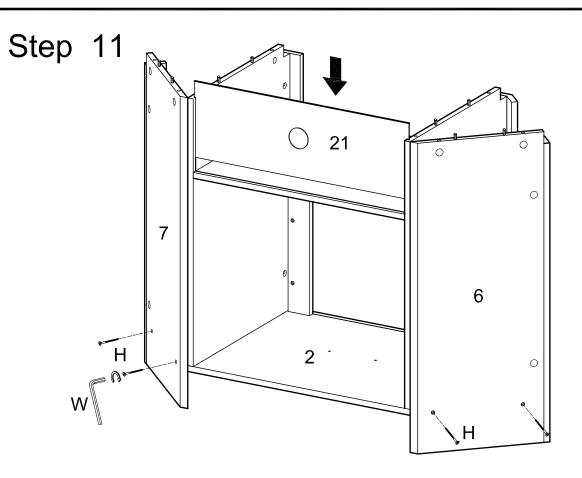


Attach the side panel (6)(7) to the bottom panel (2) and secure it by using screw (H) and wrench (W). Insert the back panel (21) into the slot of side panel (6)(7).



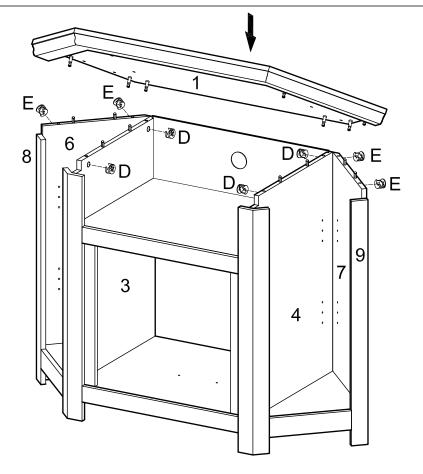




Place the top panel (1) on top of the side panel (6)(7), support panel (3)(4) and secure it by using cam locks (D).

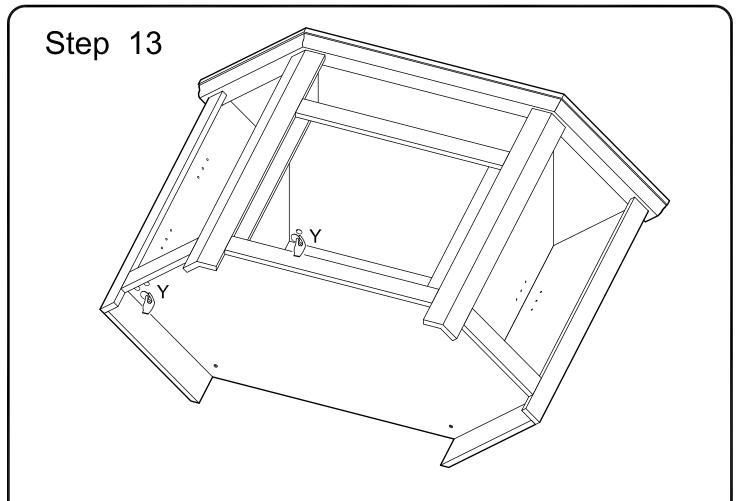


Use stickers (Y) to cover the cam locks.

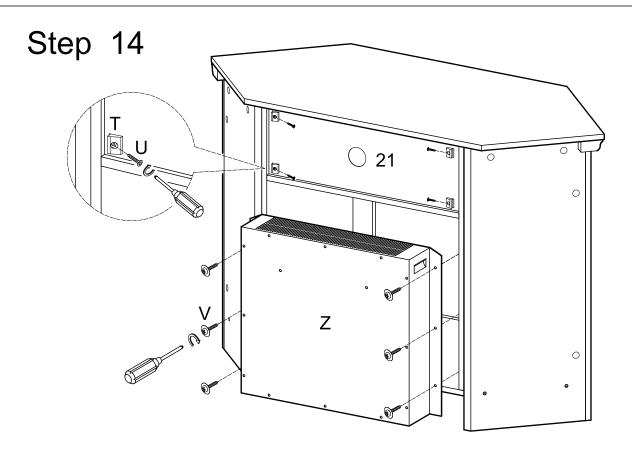

Secure the back panel (21) by using the plastic wedge (T) and screw (U). Put the fireplace insert (Z) carefully into the stand and secure it by using screw (V).

Step 15

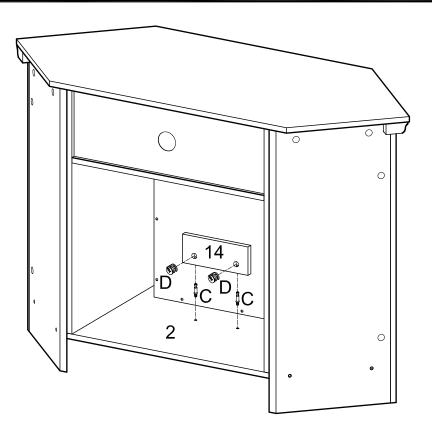


Insert the cam bolts (C) to the bottom panel (2) and attach the support panel (14) to the bottom panel (2) by using cam locks (D) to secure it.

Step 16





Use stickers (Y) to cover the cam locks.

Step 17

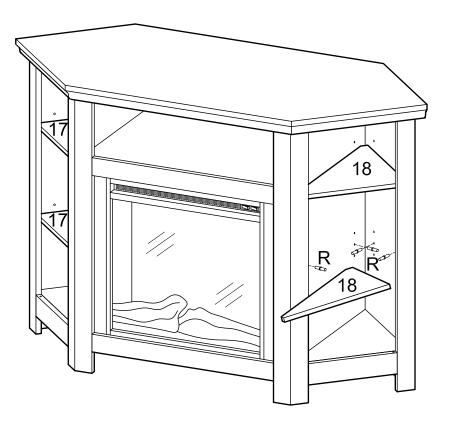


Insert the shelf support pin (R) into the stand and place the shelf (17)(18) on top.

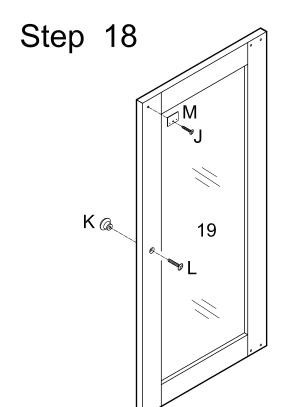


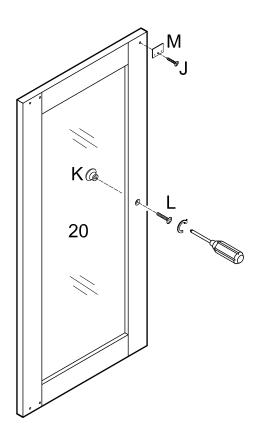


Attach the metal piece (M) to the glass doors (19)(20) and secure it by using screw (J). Attach the door knob (K) to the glass doors (19)(20) and secure it by using screw (L).

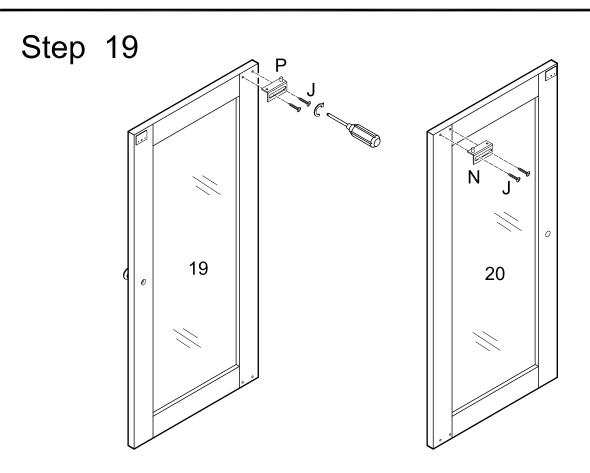

Attach the door hinge (P)(N) to the glass doors (19)(20) and secure it by using screw (J).

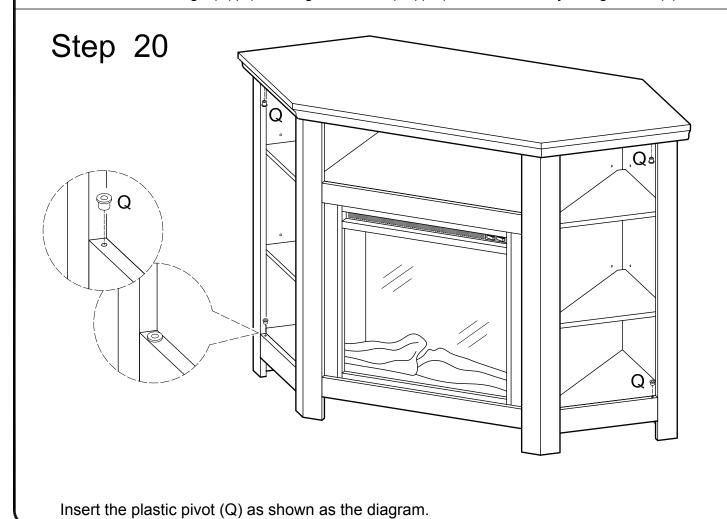

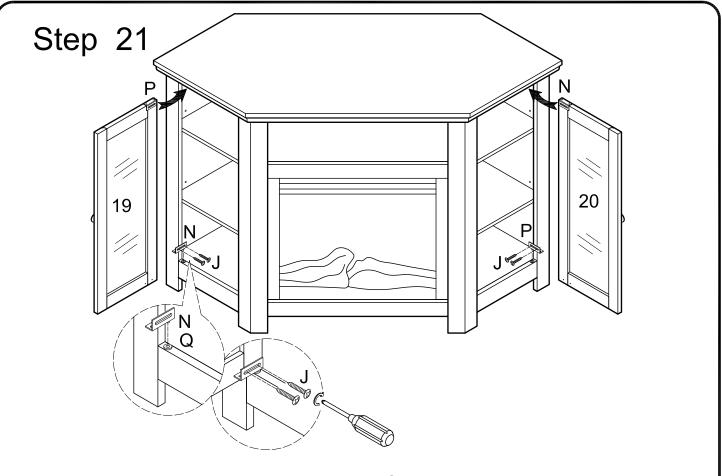

Insert the door hinge (P)(N) into the plastic pivot (Q). Insert the doors (19)(20) as shown in diagram and secure it with screw (J).

