


**OSAKA LOUNGER SINGLE, DOUBLE Assembling Instruction**


1. Combine Components A + B with JCBC 6x60 and JRN 6x13
2. Loosely Tighten the JCBC with the L4 Key just enough
3. Combine Components C & D with Clevis Pin 8x60 +Ring + Metal Pin at the end to secure in the bottom of component D (See Diagram in the Bottom for Reference)
4. Insert the Plastic Roller with The Clevis Pin 40 + Ring + Metal Pin at the end to secure on the top of component C (See Diagram in the Bottom for Reference)
5. Place & Align Component C + D with Component A + B by Inserting Plastic Roller in Both of The Arms ( Component A)
6. Tighten Components A & B as hard as possible with the L4 Key
7. Combine Components E on the front of component D with JCBC 6x40, tighten with L4 key
8. Close The Dowel Hole with Wooden Cover

**OSAKA LOUNGER SINGLE, DOUBLE Operation Instruction SOFA**

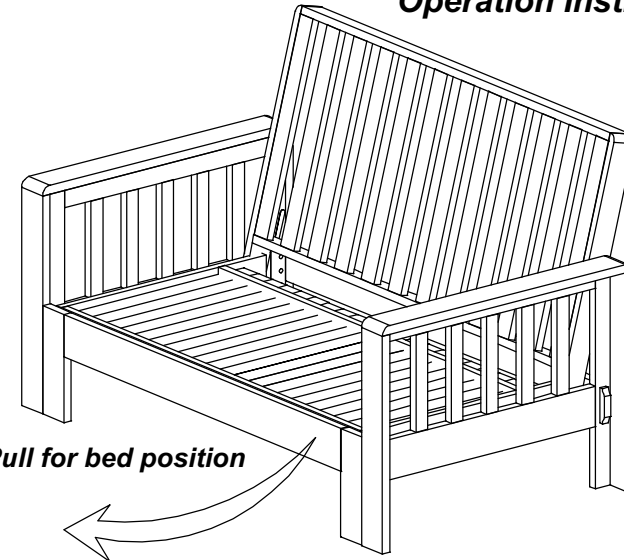


Lift and Pull for bed position

**OSAKA LOUNGER SINGLE, DOUBLE Operation Instruction BED**

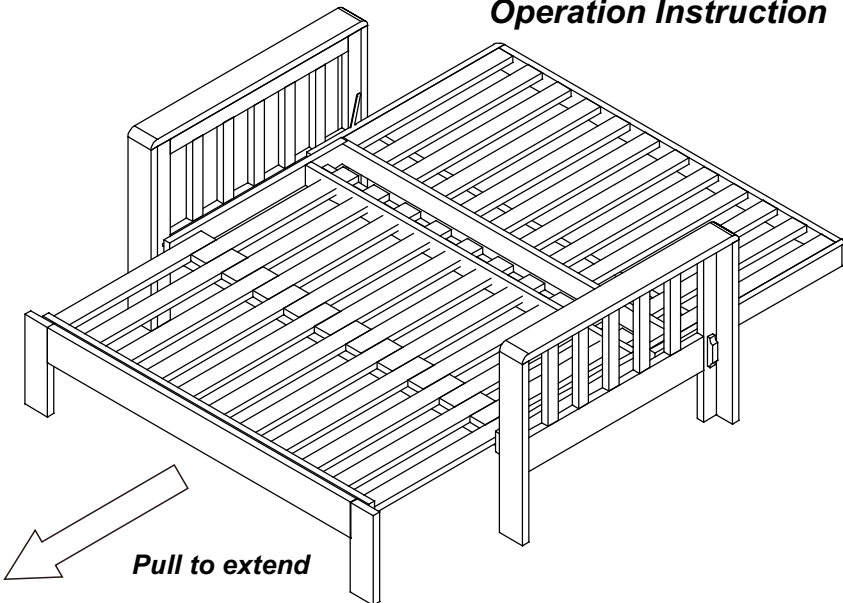


Pull to extend

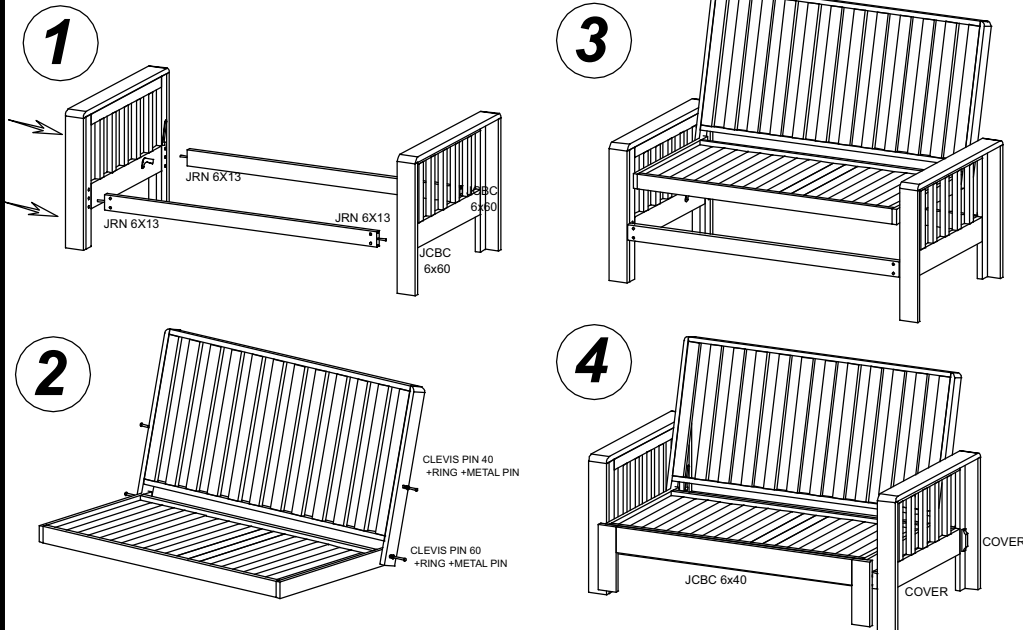

**OSAKA LOUNGER SINGLE, DOUBLE PART COMPONENT**


A 2X

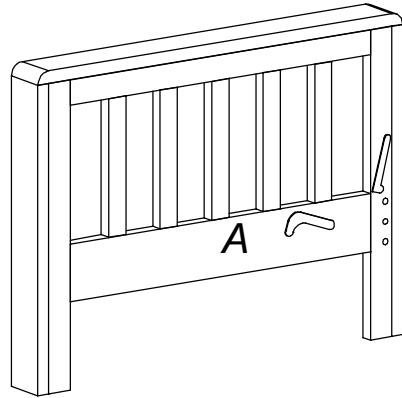

1Right  
1Left


A

B 2X

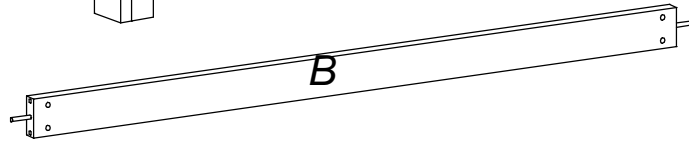


B

C 1X

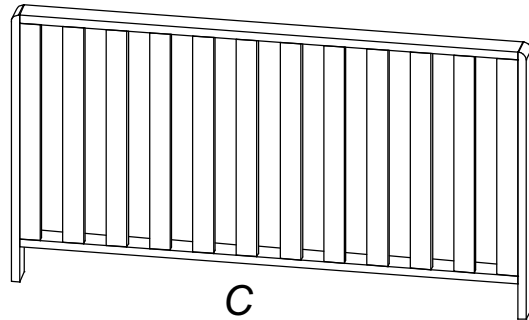


C

D 1X

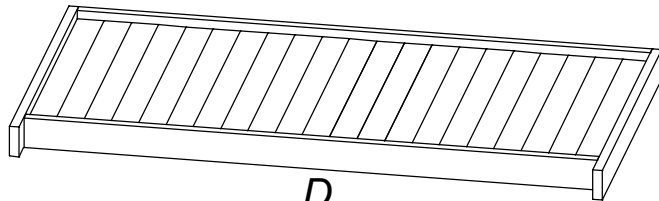

D


E 1X

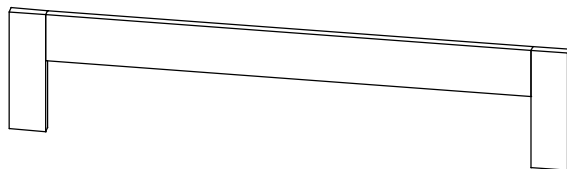

E

**OSAKA LOUNGER SINGLE, DOUBLE HARDWARE**

1. JCBC 6 x 60 = 8



2. JRN 6 x 13 = 8



3. DOWEL 10 X 45 = 4



4. JCBC 6 x 40 = 4



5. L KEY 4 = 1



6. METAL PIN 1 X 40 = 4



7. CLEVIS PIN 8X60 = 2



8. CLEVIS PIN 8X40 = 2



9. RING 16 X 8 = 4



10. PLASTIC ROLLER = 4



11. WOODEN COVER = 4

